

并联机器人

选型手册

Parallel robot selection Manual

D3WB



● 型号和符号

D3WB	600	P3	A1	E1	FXGX
机型	型号	负载	控制器类型	控制柜类型	视觉
D3W	450	P3: 3KG	A1: ATOMCONTROL A2: KEBA CONTROL	E1: ATOM-01 E2: ATOM-02 E3: 定制	F0G0: 无视觉 FXGX: 有视觉
	600				
	1200				

● Model and Symbol

D3WB	600	P3	A1	E1	FXGX
Robot type	Type	Load Type	Control Type	Control Cabinet	Vision Type
D3W	450	P3: 3KG	A1: ATOMCONTROL A2: KEBA CONTROL	E1: ATOM-01 E2: ATOM-02 E3: Custom	F0G0: Without vision FXGX: With vision
	600				
	1200				

D3WB-450-P3



高速度
高精度
高稳定性
小巧、敏捷

High speed
High precision
High stability
Small and Agile

- ◆ 标准循环时间小于0.5s,满足追求最高速度和最小体积需求

The standard cycle time is less than 0.5s, meeting your pursuit for the maximum speed and the minimum volume.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于狭小空间内作业、3C制造等行业的高速高精生产作业, 主要用于小型工件的装配、搬运、检测等

The robot is ideal for narrow space operations, as well as high-speed and high-precision in 3C field. Widely used in assembly, handling and testing of small work pieces.

型号 Type		D3WB-450-P3
轴数 Axes		3
最大负载 Payload		3kg
机器人本体 Manipulator	重量 Weight	38.7kg
	工作空间直径 Diameter	450mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	42.5°
	下摆 Down	69.8°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		3KVA
额定功率 Rated Power		1.2kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55


● 负载-频次 Load-Frequency

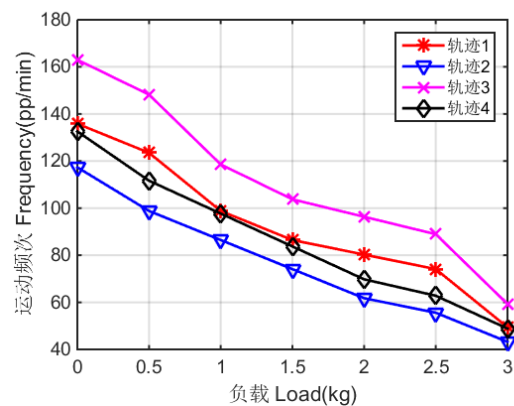

名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。


外形尺寸及运动范围
Outline dimensions and Working range (mm)

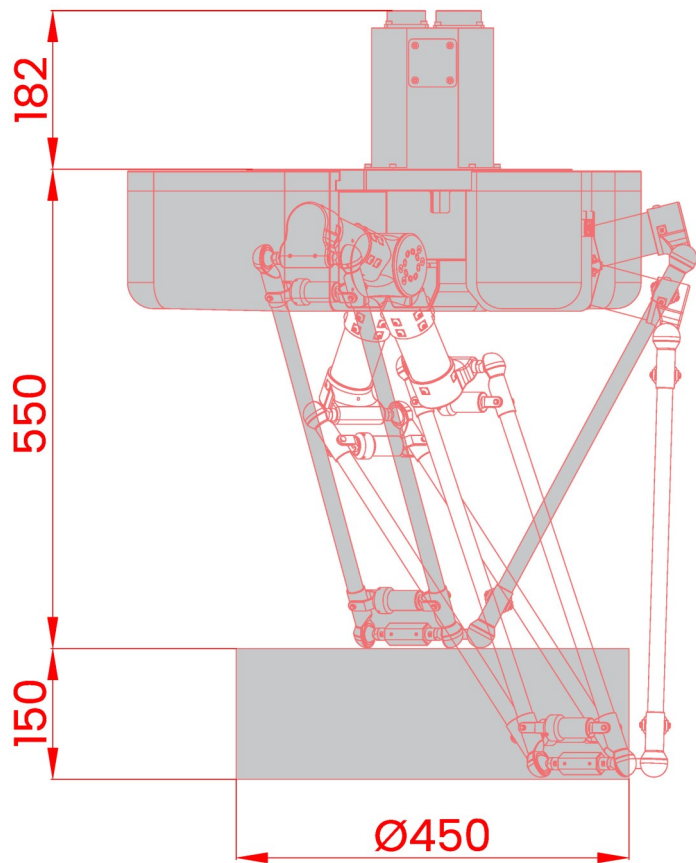


说明：
图示下部加深部分为机器人动平台几何中心的运动范围，上部为圆柱空间，并在下部向内收敛。

Instruction:
The bottom gray part is the workplace of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

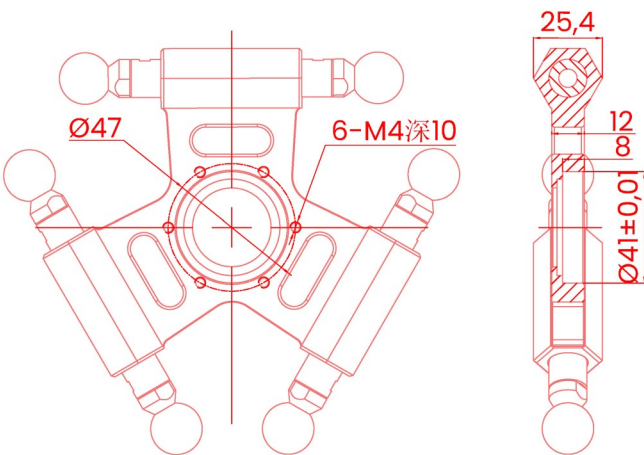

基座安装 Base installation (mm)

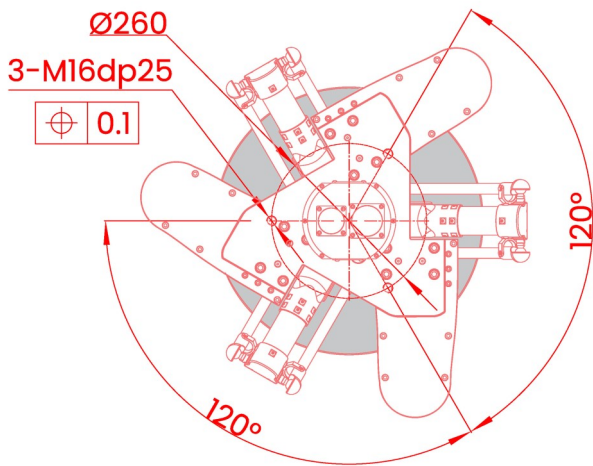

D3WB-600-P3



高速度
高精度
高稳定性
小巧、敏捷

High speed
High precision
High stability
Small and Agile

- ◆ 标准循环时间小于0.5s,满足追求最高速度和最小体积需求

The standard cycle time is less than 0.5s, meeting your pursuit for the maximum speed and the minimum volume.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于狭小空间内作业、3C制造等行业的高速高精生产作业, 主要用于小型工件的装配、搬运、检测等

The robot is ideal for narrow space operations, as well as high-speed and high-precision in 3C field. Widely used in assembly, handling and testing of small work pieces.

型号 Type		D3WB-600-P3
轴数 Axes		3
最大负载 Payload		3kg
机器人本体 Manipulator	重量 Weight	38.7kg
	工作空间直径 Diameter	600mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	42.5°
	下摆 Down	69.8°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		3KVA
额定功率 Rated Power		2.3kw
保存温度 Storage temperature		-10°C~70°C
工作环境 Work environment		-10°C~50°C, RH≤80%
防护等级 Protection		IP55


● 负载-频次 Load-Frequency

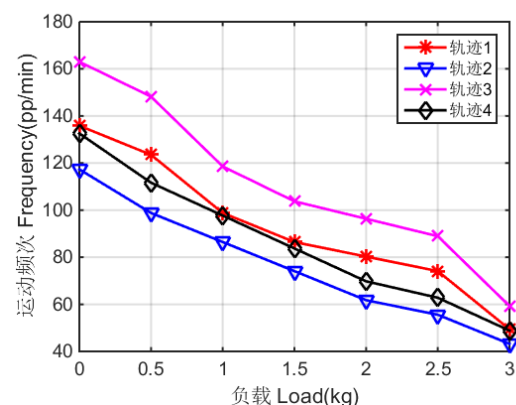

名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。


外形尺寸及运动范围
Outline dimensions and Working range (mm)

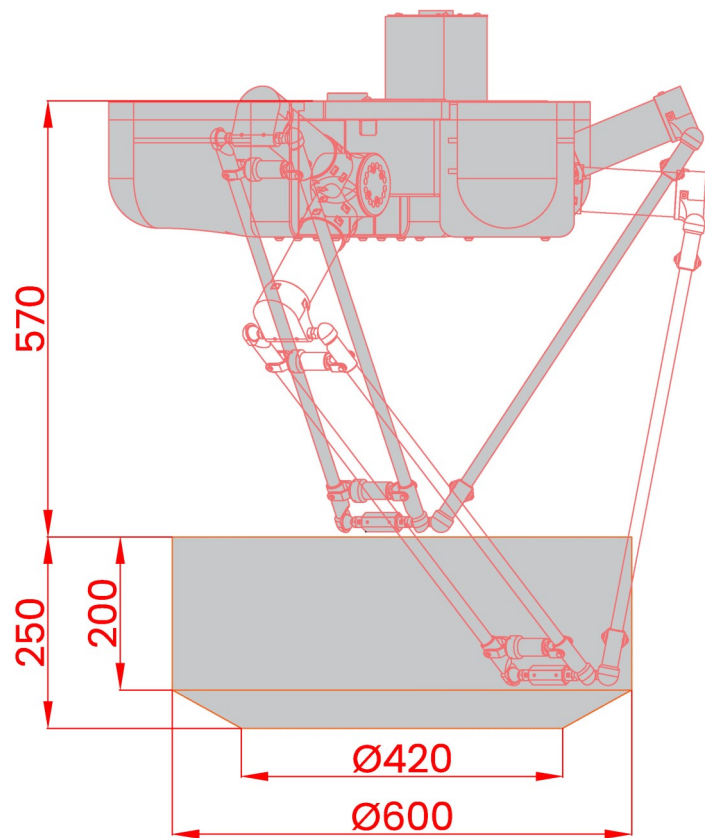


说明:
图示下部加深部分为机器人动平台几何中心的运动范围, 上部为圆柱空间, 并在下部向内收敛。

Instruction:
The bottom gray part is the workplace of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

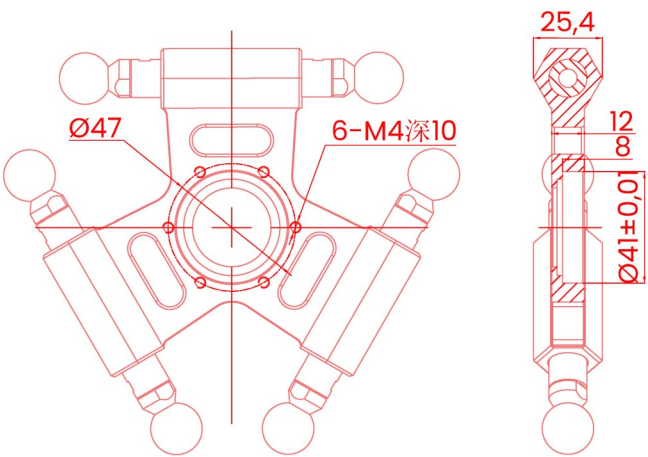

基座安装 Base installation (mm)

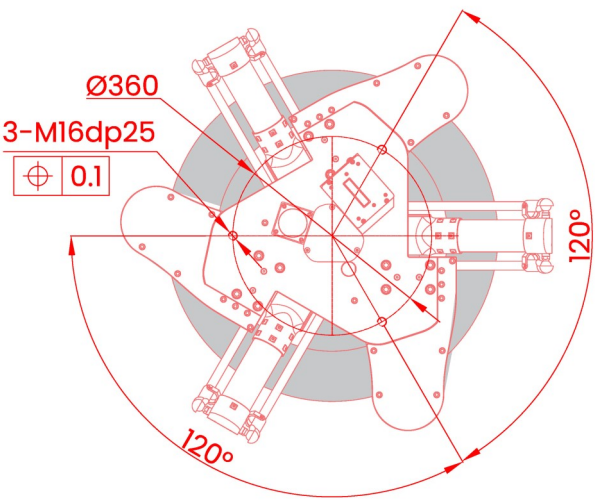

D3WB-1200-P3



高速度
高稳定性
大空间
低高度

High speed
High stability
Large space
Lower Height

- ◆ 标准循环时间小于0.4s,满足追求最高速度和最经济需求

The standard cycle time is less than 0.4s, meeting your pursuit for the maximum speed and economic.

- ◆ 特殊从动臂压缩弹簧设计, 保证从动臂使用寿命且拆装方便


Advanced design of compression spring ,enables the parallel-arm to be used for a long time and be easily dis-mounted.

- ◆ 非常适于食品、医药等行业的高速生产作业, 主要用于空间高度受限场合的物料装配、搬运、分拣等

The robot is ideal for high-speed production in food and medicine industry. Widely used in assembly, handling and pick-and-place of small materials for space height limited occasions.

型号 Type		D3WB-1200-P3
轴数 Axes		3
最大负载 Payload		3kg
机器人本体 Manipulator	重量 Weight	73.6kg
	工作空间直径 Diameter	1200mm
重复定位精度 repeatability	位置 Position	0.05mm
	旋转 Rotation	—
旋转范围 Rotation range		—
允许负载最大旋转惯量 Allowable maximum moment of inertia		—
主动臂角度范围 Angle range of actuated arm	上摆 Up	33°
	下摆 Down	87°
输入电源 Power supply		三相 Three-phase 380VAC -10%~+10%, 49~61HZ
电源容量 Power capacity		10KVA
额定功率 Rated Power		6kw
保存温度 Storage temperature		-10℃~70℃
工作环境 Work environment		-10℃~50℃, RH≤80%
防护等级 Protection		IP55


● 负载-频次 Load-Frequency

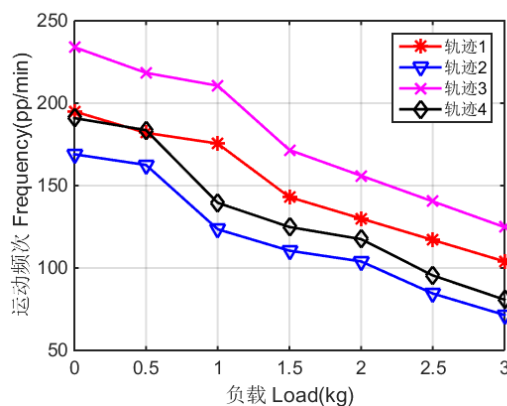

名称 Name	循环模式 Model	运动距离 Distance
轨迹1 Trajectory1	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=305
轨迹2 Trajectory2	P1 → P2 → P3 → P4 → P3 → P2 → P1	h=25, b=500
轨迹3 Trajectory3	P1 → P2 → P3 → P2 → P1	h=25, b=305
轨迹4 Trajectory4	P1 → P2 → P3 → P2 → P1	h=25, b=500

特别注意: 图中节拍时间在实际条件下测得, 但根据实际运用情况的不同 (工具数据、路径半径、夹具启动等), 节拍时间也会发生变化。

外形尺寸及运动范围 Outline dimensions and Working range (mm)

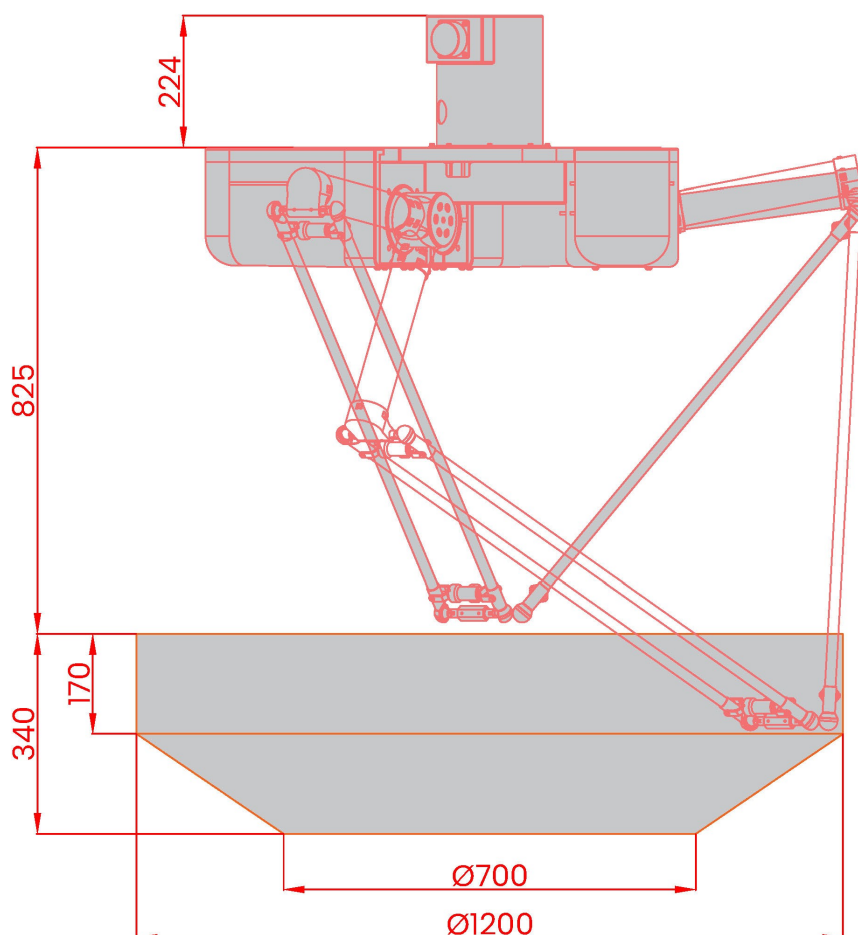


说明:

图示下部加深部分为机器人动平台几何中心的运动范围, 上部为圆柱空间, 并在下部向内收敛。

Instruction:

The bottom gray part is the workplace of the center point of moving platform, which is composed of a cylinder at the top and a circular truncated cone at the bottom.

法兰 Flange (mm)

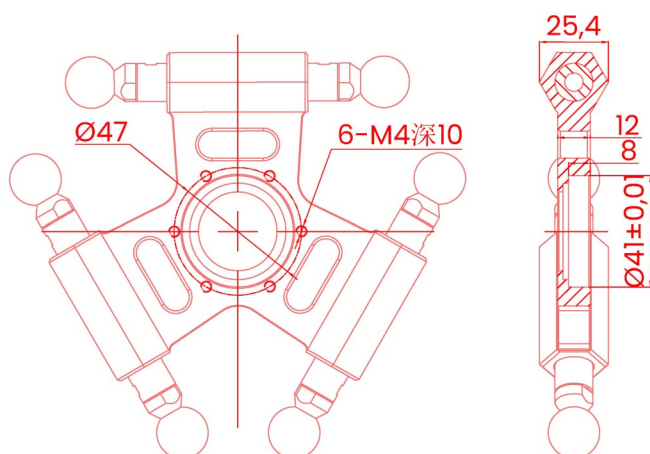

基座安装 Base installation (mm)

